

Impact of High Power Nd : YAG Laser on Surface Morphology of Zirconium Silicate

Alaa Salahaldin Awadala¹, Ahmed Elhassan Elfaky¹, Ali A. S. Marouf^{2,*}

¹Department of Physics, College of Science, Sudan University of Science and Technology, Khartoum, Sudan.

² Department of Laser Engineering and Industrial Applications, Institute of Laser, Sudan University of Science and Technology, Khartoum, Sudan.

ABSTRACT

Article Info

Volume 5, Issue 4

Page Number: 34-40

Publication Issue :

July-August-2020

Article History

Accepted : 20 July 2020

Published : 30 July 2020

In this, study the influence of high power Nd: YAG laser irradiation on the hardness and surface properties of zirconium silicate ($ZrSiO_4$) ceramics was investigated. Specimens of zirconium silicate ($ZrSiO_4$) ceramic pieces were separated into four samples according to irradiation duration as follows: one control sample (no treatment), and three samples irradiated with Nd: YAG laser at irradiation times 3, 4 and 5 minutes. The irradiation was applied with fixed output power 60 W. The hardness and tensile strength were measured and the optical properties were characterized by UV-vis spectroscopy, also EDX spectra was carried out. The present results show that high power (60 W) Nd:YAG laser provide higher hardness compared to non-treated surfaces. Extending irradiation time can induce higher hardness of the ceramics. EDX results reveal that laser irradiation does not change the chemical surface composition of ceramics. Moreover, Increase in transmittance of the irradiated zirconium silicate in the visible and near infrared range was also found using UV-vis spectroscopy.

Keywords : Hardness, Laser Irradiation, Laser-matter interaction, Surface morphology, Surface Solidification, Zirconium silicate.

I. INTRODUCTION

Lasers have diverse applications in different fields such as industrial, medical, research, military and some other different fields. In industrial field laser can used in many processes such as welding, cutting, drilling or surface solidifications. Laser-matter effects can be in diversified manners such as photothermal

represented by vaporization, ablation of matter based on absorption or in photochemical direct breakage of chemical matter bonds.

Zirconia ceramic has a leading position among ceramic materials. Its special properties, such as high mechanical strength, flexural resistance, make this ceramic material ideal for esthetic crowns, bridges,

and frameworks in the anterior and posterior region (El-Ghany and Sherief, 2016).

There have been numerous research studies the effect of laser matter irradiation; for example, laser milk pasteurization (Marouf and Sara, 2018)(Amna and Marouf, 2018), solar cell surface modification (Marouf et al., 2014), bee honey irradiation (Al Humira and Marouf, 2017) and production of highly value materials from agricultural waste (Gawbah et al., 2017 and Gawbah et al., 2018).

There have been numerous research studies the interaction of low-level lasers with biological materials such as blood; for examples; studding of He-Ne laser effect on human whole blood (Haimid, et al., 2019 a), investigating the effect of He-Ne laser on human whole blood (Haimid, et al., 2019 b), and it also used to induce emission in human teeth to distinguish between dental caries and sound teeth (Marouf and Khairallah, 2019).

Now a days, the Nd:YAG laser has been proposed for utilization to dental hard tissues for various uses, such as the effects of laser on surface morphology of dental restorative materials (Sanusi, et al., 2012) (Garcia-Sanz, et al., 2018), surface modification of Ti dental implants by laser (Braga, et al., 2014), laser treatment of dental ceramic/cement layers (Pich, et al., 2015), effects of laser on filling materials (Türkmen, et al., 2006) and effect of laser in hardness of dental ceramic (Ahmed, et al., 2014).

The main objective of this study is correlating the high power Nd: YAG laser irradiation duration time with the hardness of the zirconium silicate irradiated surface.

II. MATERIALS AND METHODS

2.1 Specimens

The materials used were commercial which went through the following stage: first grinding raw materials (Nile clay, silica sand, weather granite, kaolin, sodium silica, S.T.P.P, master mix) and then sprayed and kept in silos and pressed using (SAMI PH3590 PRESS) and pressed from 160 to 180 Bar, and then dried and it passed the glaze line which consists of (quartz, feldspar, Ball clay, I. Kaolin, Engobe frit-19, matt frit-13, opaque frit-188, Transparent frit-575, Zirconium silicate ($ZrSiO_4$), calcined alumina, transparent printing-106, transparent printing-1000, reactive printing powder-606), four rectangular specimens A, B, C and D were made with length of 2 cm, width 1 cm and thickness 2 mm. Three of these specimens (B, C and D) were exposed Nd: YAG laser with 60 W output power at continuous mode, with different irradiation times (3, 4 and 5) min and one specimen was left without treatment (A) as reference.

2.2 Laser Irradiation

An Nd: YAG laser system (Dornier Medilas fiber to 5100) operating at a wavelength of 1064 nm with continuous mode was used to irradiate specimen. Specimens were placed one by one and the Nd: YAG laser beam was projected perpendicular to the surface of the specimens. The distance from the laser window to the specimen surface was approximately 7 mm. The laser power was 60 W and laser irradiation treatments were carried out without any water spray (dry laser). All tests and characterizations were done on the exposed area in the samples.

2.3 Hardness and Tensile strength Tests

The hardness of the irradiated and non-irradiated specimens were tested using the Vickers Hardness method (ZHU250, ZWICK/ROELL, GERMANY, 2015). The principle of the Vickers Hardness method is similar to the Brinell method. The Vickers indenter is a 136 degrees square-based diamond pyramid. The impression, produced by the Vickers indenter is clearer than the impression of Brinell indenter;

therefore, this method is more accurate. The load, varying from 1kgf to 120 kgf, is usually applied for 30 seconds. The Vickers number (HV) is calculated by the following formula:

$$HV = 1.854 \times F / D^2$$

Where: F \equiv applied load/kg; D \equiv length of the impression diagonal/ mm

The length of the impression diagonal is measured using a microscope, which is usually an integral part of the Vickers Tester.

Tensile strength was calculated using the following equation:

$$T_s = 3.45 \times HB$$

2.4 EDX Analysis

An analysis of the chemical composition (EDX) of the surface layer was made for the irradiated specimens. The analysis of characteristic X-rays (EDX analysis) emitted from the sample gives more quantitative elemental information. Such X-ray analysis can be confined to analytical volumes as small as one cubic micron.

2.5 UV-vis spectroscopy

Table 1 Hardness results for untreated zirconium silicate sample (A) and zirconia treated with Nd: YAG laser specimens (B, C and D)

Sample	Hardness/ HV=1.8544 F/D ²	Hardness/HB	Hardness changes/HB	Change %
A	8.1	8	0	0
B	10.5	11	3	37.5
C	11.7	12	4	50
D	12.6	13	5	62.5

The results of irradiation on the zirconium silicate specimens' tensile strength were listed in Table 2. It was calculated by applying the following equation:

$$T_s = 3.45 \times HB$$

Table 2. Tensile strength results for untreated zirconium silicate sample (A) and zirconia treated with Nd: YAG laser specimens (B, C and D)

To study the effect of laser irradiation on the absorbance of the irradiated specimens and the non-irradiated specimens an aqueous suspension of the zirconium silicate was carried out using a Jasco-670 UV-Visible spectrometer.

III. RESULTS AND DISCUSSION

The photothermal effect of the irradiation of zirconium silicate specimens with Nd: YAG laser at 1064 nm wavelength and 60 W output power with continuous mode for different durations generates heat which caused in the following results:

3.1. Hardness and Tensile Strength Results

The results of irradiation with Nd: YAG laser (power 60 W) at different duration time (0, 3, 4 and 5) minutes on the zirconium silicate specimens' hardness were listed in Table 1. It shows that the hardness of the irradiated samples was obviously increased. A considerable increasing in hardness with increasing irradiation time from 3 to 5 minutes was found; it changed at a constant irradiation time at one minute. It increased about one third (37.5%) at irradiation time three minutes, it increased the half (50%) at four minutes and about two thirds (62.5%) at five minutes.

Sample	Hardness/ HB	Tensile strength/ MPa	Tensile strength changes/ MPa	Change %
A	8	27.6	0	0
B	11	37.95	10.35	27.27
C	12	41.4	13.8	33.33
D	13	44.85	17.25	38.46

The experimental data presented in Tables 1 and 2 show that, in all experiments, a linear correlation between hardness or tensile strength and laser irradiation time was detected.

Figure 1 A) depict the linear correlation between hardness and irradiation time. While Figure 1 B) depict the linear correlation between hardness change and irradiation time.

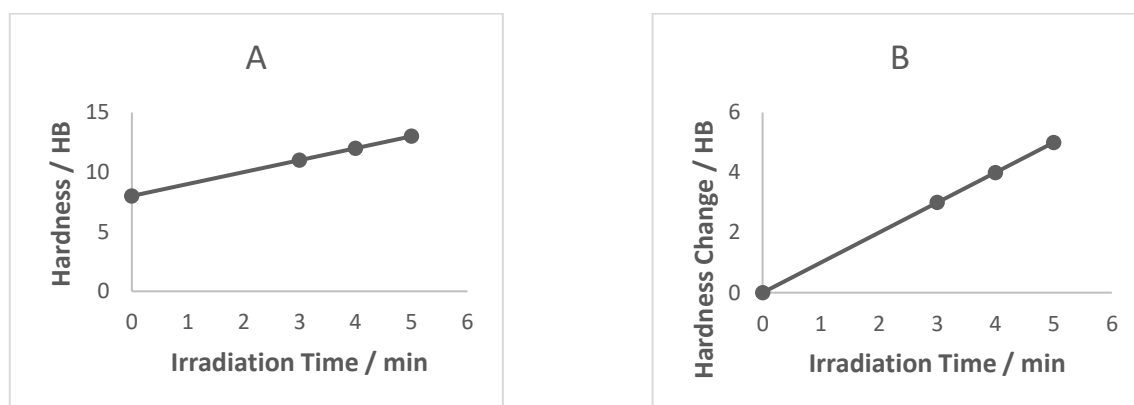


Figure 1. Effect of irradiation time on zirconium silicate samples' A) hardness B) change in hardness

Figure 2 depict A) depict the linear correlation between tensile strength and irradiation time, While Figure 2 B) depict the linear correlation between tensile strength change and irradiation time.

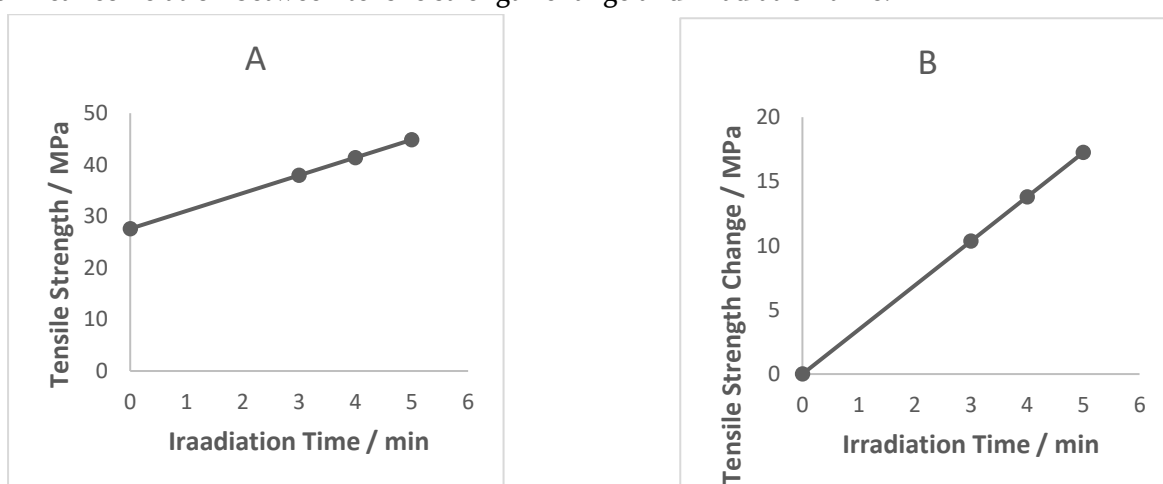


Figure 2. Effect of irradiation time on zirconium silicate samples' A) tensile strength B) tensile strength change

Graphs in Figures 1 and 2 presented that extending irradiation time can induce higher hardness of the ceramics.

3.2. EDX Results

The EDX spectra shown in Figure 3 giving the elemental analysis data of the samples before and after laser irradiation treatment (with 4 and 5 minutes). The presence of the same elements is coincides with the results from laser irradiated and non-irradiated specimens, which mean that laser irradiation do not change the chemical surface composition of ceramics. EDX spectra show that the zirconium and silicon have the highest peaks compared to the other elements as shown in Table 3.

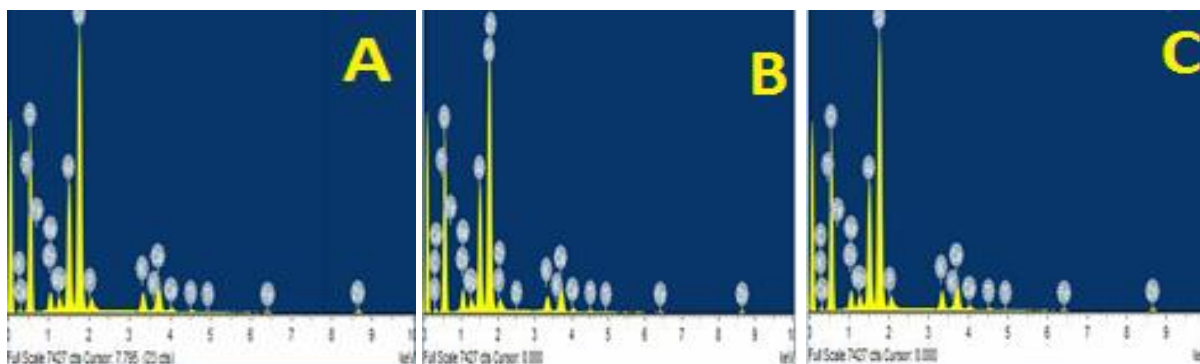


Figure 3 : EDX spectra of zirconium silicate (A) before, B) and C) after Nd: YAG laser irradiation (60 W): 0, 4 and 5 min irradiation duration respectively

Table 3 EDX results of zirconium silicate sample (A) before, sample B) and samples C) after Nd: YAG laser irradiation (60 W): 0, 4 and 5 min irradiation duration respectively

Element	Sample A		Sample C		Sample D	
	Weight%	Atomic%	Weight%	Atomic%	Weight%	Atomic%
C K	0	0	2.95	4.87	6.20	10.04
O K	54.14	68.64	54.31	67.30	51.70	62.82
Na K	1.70	1.50	1.61	1.39	1.88	1.59
Mg K	1.09	0.91	0.89	0.73	0.81	0.65
Al K	9.51	7.15	8.94	6.57	8.78	6.32
Si K	23.59	17.03	21.25	15.00	21.19	14.67
P K	1.24	0.81	0.64	0.41	1.21	0.76
K K	2.22	1.15	1.76	0.89	1.75	0.87
Ca K	3.71	1.88	3.45	1.71	3.23	1.57
Ti K	0.26	0.11	0.23	0.09	0	0
Fe K	0.57	0.21	0.29	0.10	0.27	0.09
Zn K	1.97	0.61	1.73	0.52	1.63	0.49
Zr L	0	0	1.96	0.43	0	0
Pt M	0	0	0	0	1.34	0.13
Totals	100.00		100.00		100.00	

3.3. UV-vis spectroscopy Results

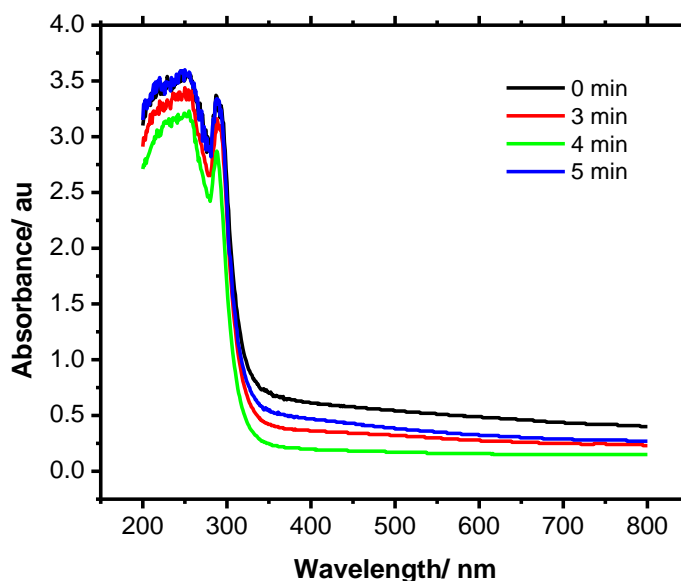


Figure 4 : UV spectra of zirconium silicate specimens before and after laser irradiation

The UV-vis spectroscopy spectra of the four samples are shown in Figure 4. Decreased absorbance was observed in the laser-irradiated samples in the visible and near infrared range (350-800 nm). When comparing non-irradiated sample with each of the laser irradiated samples, non-irradiated sample always showed higher absorbance. The process of laser irradiation presented effect in transmittance of the zirconium silicate.

IV. CONCLUSION

In summary, the experimental results obtained from high power Nd: YAG laser irradiation of zirconium silicate show that the hardness of zirconium silicate could be increased with irradiation. A linear correlation between hardness or tensile strength and laser irradiation time was detected. EDX results reveal that laser irradiation do not change the chemical surface composition of ceramics. Moreover, UV-vis spectra show more transmittance of irradiated zirconium silicate specimens compared to the non-irradiated specimens. Nd: YAG laser irradiation with

(60 W) can increase the hardness of zirconium silicate ceramics.

V. ACKNOWLEDGEMENTS

First, we would like to express our heart full appreciation to almighty God. Secondly, to institute of laser in accessing the instrumentation and lastly to (Lab. Assistants) in institute of laser and college of science, Sudan University of Science and Technology.

VI. REFERENCES

- [1]. Ahmed, M.M., Abdelrahman, A.H., Mohieldin, E. and Yagoub, S.O., 2014. Effect of Diode Laser 810nm in Hardness of Dental Ceramic. *Optics and Photonics Journal*, 2014.
- [2]. Al Humira Elseir Gorashe Ahmmed, A. and Marouf, A.S., 2017. Effect of Pulsed He-Ne Laser Irradiation on Bee Honey Physicochemical Properties. *The Saudi Journal of Life Sciences (SJLS) ISSN 2415-623X (Print)*, 2(9), 378-387. Doi:10.21276/haya.2017.2.9.11
- [3]. Amna O.B Malik and Marouf, A.A., 2018. Comparison of the Effects of Laser

- Pasteurization and Heat Pasteurization on The Cow's Milk, Haya: The Saudi Journal of Life Sciences,3(1), 46-50. Doi:10.21276/haya.2018.3.1.9
- [4]. Braga, F.J., Marques, R.F. and GUASTALDI, A.C., 2014. Surface modification of Ti dental implants by Nd: YVO4 laser irradiation. *Applied Surface Science*.
- [5]. El-Ghany, O.S.A. and Sherief, A.H., 2016. Zirconia based ceramics, some clinical and biological aspects. *Future dental journal*, 2(2), pp.55-64.
- [6]. Garcia-Sanz, V., Paredes-Gallardo, V., Mendoza-Yero, O., Carbonell-Leal, M., Albaladejo, A., Montiel-Company, J.M. and Bellot-Arcis, C., 2018. The effects of lasers on bond strength to ceramic materials: A systematic review and meta-analysis. *PloS one*, 13(1).
- [7]. Gawbah, M.A.P., Elbadawi, A.A., Alsabab, Y.A., Orsod, M.U. and Marouf, A.A., 2018. Characterization of the Crystal Structure of Sesame Seed Cake Burned by Nd: YAG Laser. *Journal of Materials Science and Chemical Engineering*, 6(04), p.121. doi:10.4236/msce.2018.64013
- [8]. Gawbah, M.A.P., Marouf, A.A., Alsabab, Y.A., Orsod, M.U. and Elbadawi, A.A., 2017. Synthesis of Silica, Silicon Carbide and Carbon from Wheat Bran and Converting Its Crystal Structure Using Nd: YAG Laser. *future*, 2, p.9.
- [9]. Haimid, M.A., Marouf, A.A. and Abdalla, M.D., 2019 a. Helium-Neon Laser Effects on Human Whole Blood by Spectroscopy In vitro Study. *Asian Journal of Physical and Chemical Sciences*, pp.1-6. doi:10.9734/AJOPACS/2019/46214
- [10]. Haimid, M.A., Marouf, A.A. and Abdalla, M.D., 2019 b. In vitro UV-Visible and FTIR Spectroscopy Study of Low Power He-Ne Laser Irradiation on Human Blood. *Asian Journal of Research and Reviews in Physics*, pp.1-7. doi:10.9734/AJR2P/2019/46527
- [11]. Marouf, A. and Sara, I.E., 2018. Monitoring pH During Pasteurization of Raw Cow's Milk using Nd: YAG Laser. *International Journal of Advanced Research in Physical Science (IJARPS)*, 4(12), pp.1-4.
- [12]. Marouf, A.A., Abdalah, S.F., Abdulrahman, W.S. and Al Naimee, K., 2014. The Role of Photonic Processed Si Surface in Architecture Engineering. *Study of Civil Engineering and Architecture*, 3, pp.93-97.
- [13]. Marouf, A.A., Khairallah Y. A., 2019. Photoemission Spectra of Sound Tooth and Those of Different Carious Stages. *European Journal of Biophysics*. 7(1), pp. 23-26. doi: 10.11648/j.ejb.20190701.14
- [14]. Pich, O., Franzen, R., Gutknecht, N. and Wolfart, S., 2015. Laser treatment of dental ceramic/cement layers: transmitted energy, temperature effects and surface characterisation. *Lasers in medical science*, 30(2), pp.591-597.
- [15]. Sanusi, S., Seow, W.K. and Walsh, L.J., 2012. Effects of Er: YAG laser on surface morphology of dental restorative materials. *Journal of Physical Science*, 23(2), pp.55-71.
- [16]. Turkmen, C., Sazak, H. and Günday, M., 2006. Effects of the Nd: YAG laser, air-abrasion, and acid-etchant on filling materials. *Journal of oral rehabilitation*, 33(1), pp.64-69.

Cite this article as :

Alaa Salahaldin Awadala, Ahmed Elhassan Elfaky, Ali A. S. Marouf, "Impact of High Power Nd : YAG Laser on Surface Morphology of Zirconium Silicate ", *International Journal of Scientific Research in Chemistry (IJSRCH)*, ISSN : 2456-8457, Volume 5 Issue 4, pp. 34-40, July-August 2020. URL : <http://ijsrch.com/IJSRCH20549>